

Cavity Wall

Available for cavity widths from 50mm to 165mm

OUTER LEAF

102mm

INNER LEAF

100mm




L5

To achieve loading figures lintel must be built in with blockwork as shown. Ensure all perpendicular and horizontal joints are filled with mortar. Place mortar bed on top of blockwork before floor units are laid to provide even distribution of load. Lintels may be propped to facilitate speed of construction.

Extra Heavy Duty Load

L5/75 For cavity 70-85mm

70-85mm cavity

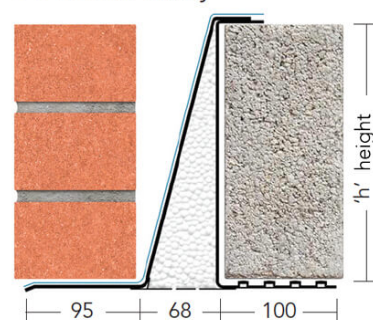

↔ Length (mm)	↑↓ Height (mm)	⊕⊖ Thickness (mm)	⚖️ Total UDL kN 19:1
600 1500	234	2.9	70
1650 2100	234	2.9	60
2250 3000	234	2.9	50
3150 4000	234	3.2	45
4200 4800	234	3.2	40