


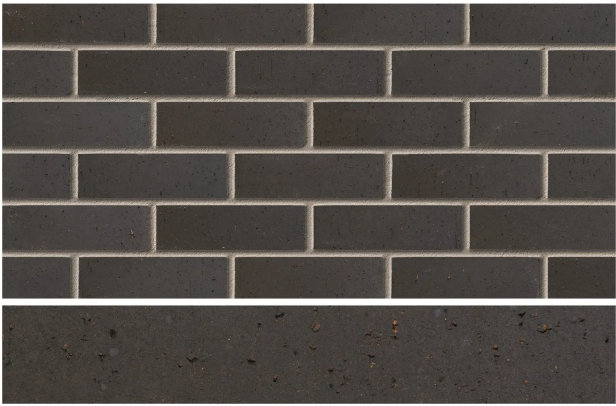

Product Information

Ibstock Code	A2221A
Type	Wirecut Extruded
Facing Description	Dragfaced
Dry Brick Weight	2.4kg
Pack Quantity	380
Packaging (standard)	Banded (Plastic)
Factory	Lodge Lane
EPD	Lodge Lane Product Group 1&3 (HUB-1066)

Technical Specification (to BS EN 771-1)

Brick Dimensions (L x W x H mm)	215x102x65
Size Tolerances Mean & Range	T2 R1
Configuration	Vertically Perforated
Voids (%)	23-28%
Compressive Strength (N/mm²)	75
Active Soluble Salts	S2
Water Absorption (% weight)	7
Durability	F2~
Gross Dry Density (kg/m³)	1650
Equivalent Thermal Conductivity "K" value 5% Exposed	1.19
Initial Rate of Absorption (Suction Rate) (kg/m²/min)	0.1
EAN	5036335012772