


Loading Guide Tables

STANDARD LOAD

Section Profiles


HT/S+ 100 For cavity widths 90-105

Manufactured Length 150mm increments	600- 1200	1350- 1500	1650- 1800	1950- 2100	2250- 2400	2550- 2700	2850- 3000	3150- 3600	3750- 4200
Height (h)	100	107	150	150	175	190	190	234	234
Thickness	1.6	2.0	2.0	2.0/2.5	2.0/2.5	2.5	2.5/2.9	2.9	3.2
Total UDL kN 3:1	12	16	19	21	23	27	27	27	27
Total UDL kN 19:1	10	13	16	17	18	22	20	20	22




HT/S+ 110 For cavity widths 110-125

Manufactured Length 150mm increments	600- 1500	1650- 1800	1950- 2100	2250- 3000	3150- 3600	3750- 4200
Height (h)	118	118	130	190	234	234
Thickness	2.0	2.0/2.5	2.5	2.5/2.9	2.9	3.2
Total UDL kN 3:1	16	22	21	27	27	27
Total UDL kN 19:1	13	18	17	22	20	22




HT/S+ 130 For cavity widths 130-145

Manufactured Length 150mm increments	600- 1500	1650- 1800	1950- 2100	2250- 3000	3150- 3600	3750- 4200
Height (h)	118	118	130	190	234	234
Thickness	2.0	2.0/2.5	2.5	2.5/2.9	2.9	3.2
Total UDL kN 3:1	16	22	21	27	27	27
Total UDL kN 19:1	13	18	17	22	20	22

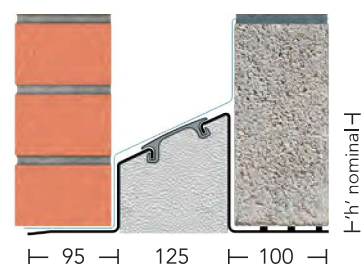

HT/S+ 150 For cavity widths 150-165

Manufactured Length 150mm increments	600- 1500	1650- 1800	1950- 2100	2250- 3000	3150- 3600	3750- 4200
Height (h)	118	118	130	190	234	234
Thickness	2.0	2.0/2.5	2.5	2.5/2.9	2.9	3.2
Total UDL kN 3:1	16	22	21	27	27	27
Total UDL kN 19:1	13	18	17	22	20	22

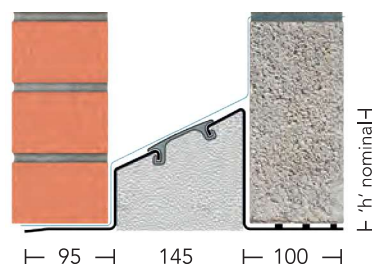

Please note other cavity widths and loading conditions are available.