

Cavity Wall

Available for cavity widths from 50mm to 165mm

OUTER LEAF

102mm

INNER LEAF

100mm




L5

To achieve loading figures lintel must be built in with blockwork as shown. Ensure all perpendicular and horizontal joints are filled with mortar. Place mortar bed on top of blockwork before floor units are laid to provide even distribution of load. Lintels may be propped to facilitate speed of construction.

Extra Heavy Duty Load

L5/XHD 50 For cavity 50-65mm

50-65mm cavity

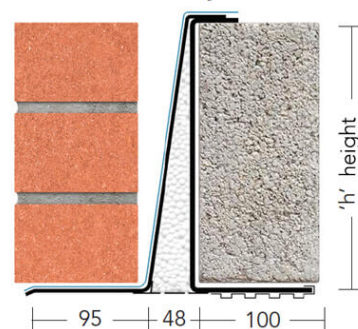

 Length (mm)	 Height (mm)	 Thickness Inner	 Thickness Outer	 Total UDL kN 19:1
600 1800	233	5.0	2.9	100
1950 2400	233	5.0	2.9	90
2550 3000	233	5.0	2.9	80
3150 3600	233	5.0	3.2	65
3750 4800	233	5.0	3.2	50